(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁷: G06F 3/033

(21) International Application Number:
PCT/FI2004/050140

(22) International Filing Date: 1 October 2004 (01.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20031433   3 October 2003 (03.10.2003)   FI

(71) Applicant (for all designated States except US): NOKIA
CORPORATION [FI/FI]; Keilalahdentie 4, FI-02150 Es-
poo (FI).

(72) Inventor; and
(75) Inventor/Applicant (for US only): AALTONEN, Antti
[FI/FI]; Paalijärventie 112, FI-33680 Tampere (FI).

(74) Agent: TAMPEREEN PATENTTITOIMISTO OY;
Hermiankatu 12 B, FI-33720 Tampere (FI).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
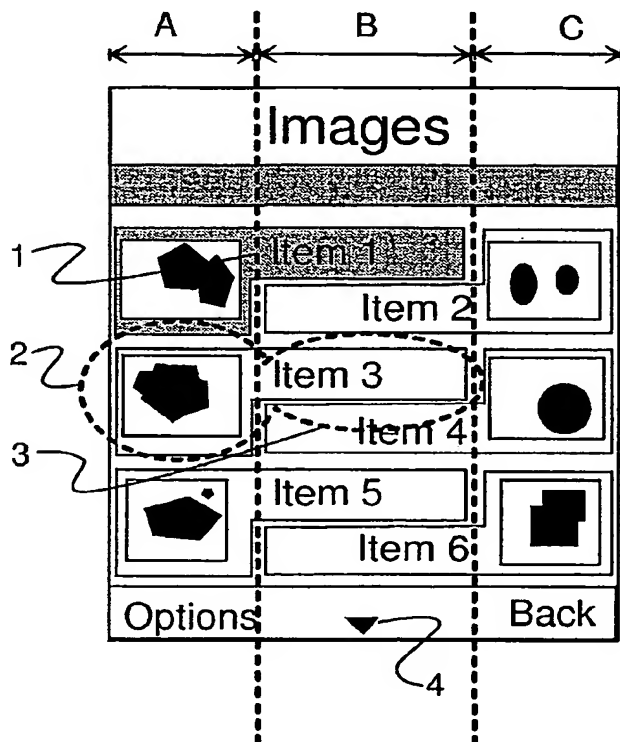TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

[Continued on next page]

(54) Title: METHOD FOR FORMING MENUS

(57) Abstract: A method of forming a menu on
a display of an electronic device, which menu
comprises at least two function elements (1)
for selecting functions. The method comprises
the steps of defining at least three display areas
(A, B, C) that are substantially adjacent to each
other in a first direction, defining at least a first
identification part (2) and a second identification
part (3) that are contained in the function element
(1), displaying the first identification part (2) of
the function element (1) in said first direction
on the outermost display areas (A, C), displaying
the second identification part (3) of the function
element (1) on at least one display area (B) between
said outermost display areas (A, C) in such a
manner that the second identification part of the
first function element and the second identification
part of the second function element are positioned
at least substantially next to each other in a second
direction substantially perpendicular to said first
direction. The invention also relates to a graphical
user interface (GUI), a device, a system, a software
program and to a storage medium.

WO 2005/033922 A1

WO 2005/033922 A1

SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.